

ROTAMAT® Rotary Drum Fine Screen Ro 2 / RPPS



Reliable and well-proven inlet screen for
municipal sewage treatment plants and industrial
wastewater and process water screening

- with integrated screenings press
- with integrated screenings washing
- more than 1500 installations worldwide



►► The challenge – Our solution

Both municipal wastewater treatment plants and industrial applications (for process and wastewater treatment) require mechanical treatment as a first treatment step to remove as much as possible of the floating, settling and suspended material.

The aim is to achieve the maximum separation efficiency under the prevailing hydraulic conditions. Operating reliability, efficiency and hygienic operation are important factors for a mechanical separation plant.

The ROTAMAT® Rotary Drum Fine Screen Ro 2 operation is based upon a unique system that allows combination of screening, washing, transport, compaction and dewatering in a single unit.

Depending on the screen bar spacing (0.5 - 6 mm) or perforation (2 - 6 mm) and screen size (screen basket diameter of up to 3000 mm), the throughput can be individually adjusted to specific site requirements.


The ROTAMAT® Rotary Drum Fine Screen is completely made of stainless steel and acid treated in a pickling bath.

The screen can be installed either directly in the channel or in a separate tank.

Design and function:

ROTAMAT® Rotary Drum Fine Screens are either installed directly into the channels, or are supplied as tank-mounted units, with an inclination of 35°. The wastewater flows into the open end of the inclined screen basket and then through the screen. Floating and suspended materials are retained by the screen basket. Blinding of the screen surface generates an additional filtering effect so that solids can be retained that are smaller than the bar spacing or perforation.

The basket starts to rotate when a certain upstream water level is exceeded due to screen surface blinding. The rotating screen drum lifts the screenings and drops them into the centrally arranged trough. Screenings removal from the drum is supported by a scraper brush and a spray nozzle bar. A screw conveyor in the trough rotates with the drum and transports the screenings through a closed and inclined pipe. The conveying screw transports, dewateres and compacts the screenings, without any odour nuisance, and discharges them into the customer's container or a subsequent conveying unit.

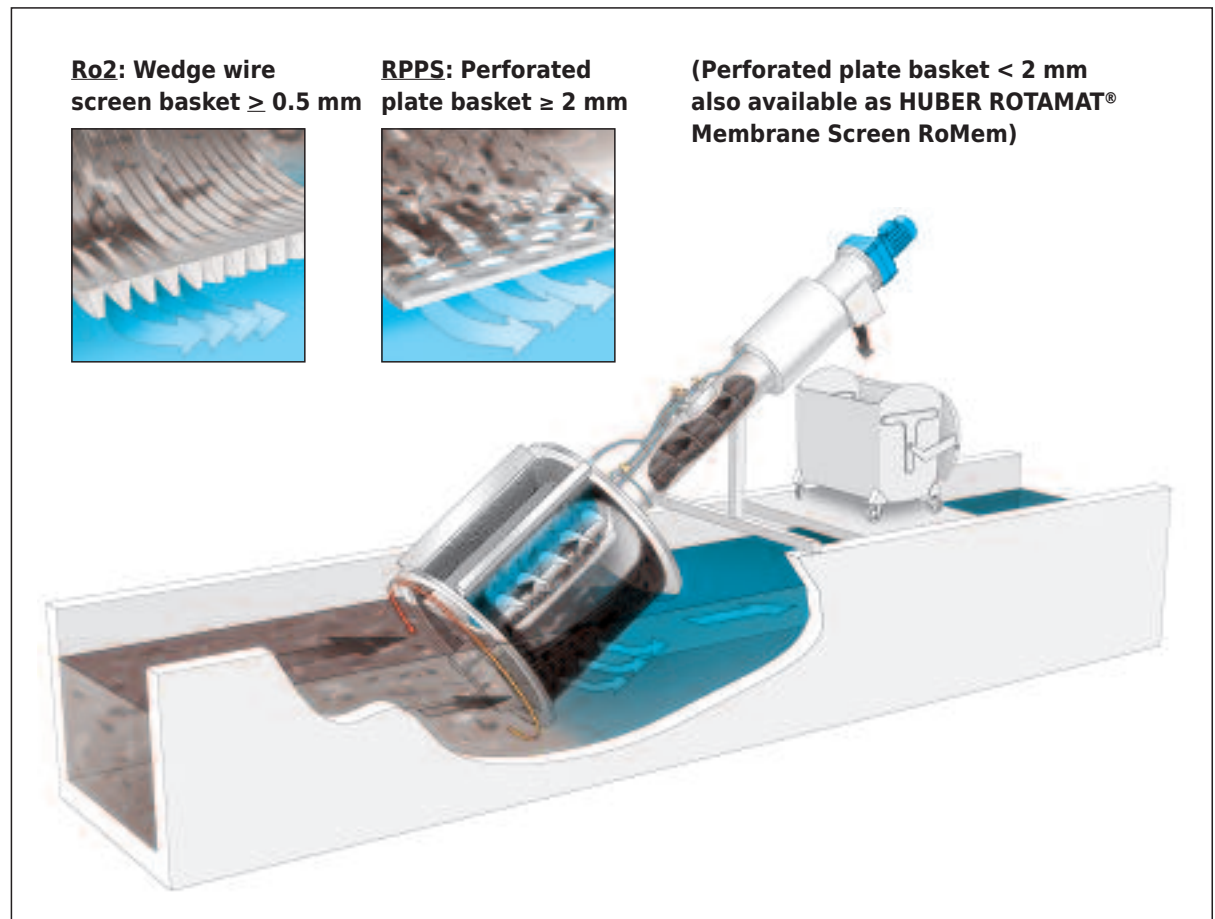

►► Integrated Screenings Washing System IRGA

To optimise the treatment process an integrated screenings washing system IRGA can be provided. It improves the carbon/nitrogen ratio of the pretreated wastewater. In addition, the IRGA reduces the costs of screenings disposal.

The ROTAMAT® principle allows for integration of the screenings washing system directly in the trough and/or the lower end of the rising pipe. As the soluble matter is separated from the inert material, faeces are virtually completely washed out which leads to a significant weight reduction.

- Optimal cost/performance ratio
- Easy retrofit
- Minimised disposal costs
- Improved operating and hygienic conditions
- Virtually complete washout of faeces
- Weight reduction by approx. 50 %
- Dewatering performance of up to 40 % DS

The dewatering performance can be increased to more than 45 % DR by adding a **high pressure unit (HP)** to the integrated screenings washing system IRGA. This combination guarantees the maximum dewatering performance and reduces disposal and operating costs.



Several parallel ROTAMAT® Rotary Drum Fine Screens with integrated screenings washing IRGA

►► Advantages of the ROTAMAT® Rotary Drum Fine Screen

a) Low headloss – High separation efficiency

Due to the drum's shape and 35° installation the screen area is much larger than that of a vertical or steeply inclined screen, which results in a low headloss, high separation efficiency and maximum throughput.

b) Completely made of stainless steel

The machine is completely made of stainless steel and pickled in an acid bath which eliminates corrosion and thus reduces maintenance.

c) No by-passing

The entire flow enters the screen drum through its open front end and can only leave the drum through its screen area. This prevents plant overflow and guarantees that the screenings are always retained within the screen drum.

d) Several functions combined in one system

The ROTAMAT® Screens perform the functions of screenings removal, transport, washing, dewatering and compaction in a single space-saving unit. An additional bagging unit guarantees operation of the entire system without odour nuisance.

e) Outdoor installation

For frost-proof outdoor installation, the ROTAMAT® Rotary Drum Fine Screen can be supplied with a heating wire and thermal insulation.

f) Retrofitting

The design of the ROTAMAT® Screens allows for later modification so that the systems can be adapted to changing requirements. The heating and/or integrated screenings washing can be retrofitted. The bar spacing can also be reduced to meet more stringent requirements.

g) Low maintenance

No lubrication. Regular checking and visual inspection are sufficient.

➤➤ A few examples from thousands of installations



ROTAMAT® Rotary Drum Fine Screen Ro 2 installed in the channel with a movable stainless steel cover, size 600 to 3000



Individually adapted installation with lateral screenings discharge directly into a container



Tank-mounted ROTAMAT® Rotary Drum Fine Screen ...



... from size 600 to size 2400

➤➤ Screen sizes

Screen basket diameter: 600 - 3000 mm

Installation angle: 35°

Bar spacing: 0,5 - 6 mm

Perforation: 2 - 6 mm

Perforation < 2 mm Available as
HUBER ROTAMAT®
Membrane Screen RoMem

Hans Huber AG

Maschinen- und Anlagenbau
Postfach 63 · D-92332 Berching

Phone: + 49 - 84 62 - 201 - 0
Telefax: + 49 - 84 62 - 201 - 810
E-mail: info@huber.de
Internet: www.huber.de

Subject to technical modification

ROTAMAT®
Rotary Drum Fine
Screen Ro 2 / RPPS