

HUBER Climber Screen ClimbMax®




Well proven screening technology for coarse material removal

- Sturdy construction, reliable in operation, minimum maintenance
- Easy to retrofit into existing channels
- No submerged moving parts




►► Design and function

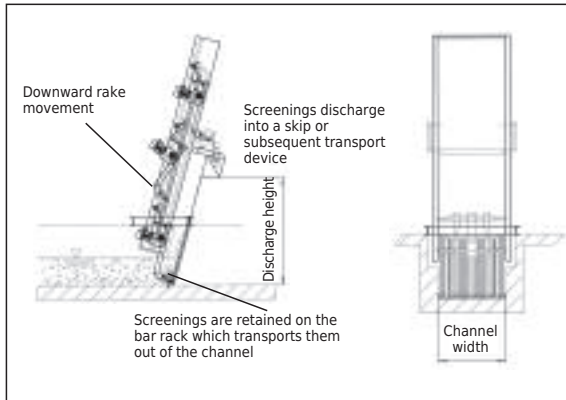

►► The benefits of the HUBER ClimberMax® Screen

- The pin gear construction
 - enables even, parallel movement of the carriage and rake due to the constant length of pin gear sections.
 - ensures high operational reliability due to defined meshing of the rake into the bar rack.
 - allows arrangement of all driving elements and bearings above water level (no submerged moving parts).
- is applicable for very high flow rates.
- The sturdy construction can be retrofitted into existing channels.

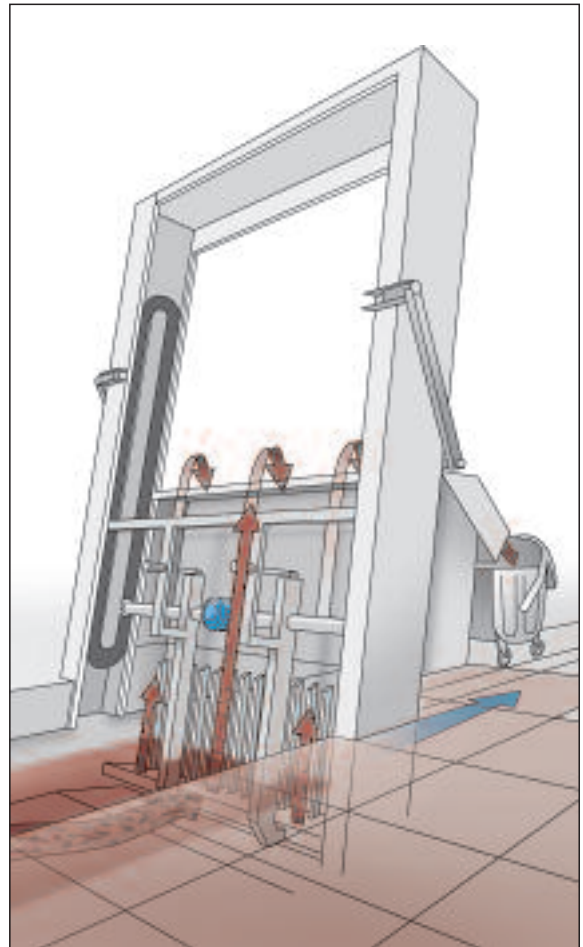

►► Technical data

- Standard channel width: 600 to 4000 mm*
- Discharge height:
≥ 1835 mm + (a multiple of 507 mm)
- Water level:
Maximum level of impoundage up to 2600 mm*
- Bar spacings:
 - Front cleaned screen: ≥ 6 mm
 - Back cleaned screen: ≥ 15 mm

* Bigger dimensions are available upon request.

►► Fields of application

- Coarse material separation in municipal and industrial sewage treatment plants
- Protection of delivery pumps in pumping stations
- Coarse material removal in intake structures
- Screening for combined sewer overflows

Hans Huber AG

Maschinen- und Anlagenbau
Postfach 63 · D-92332 Berching

Phone: +49-8462-201-0
Telefax: +49-8462-201-810
E-mail: info@huber.de
Internet: www.huber.de

Subject to technical modification

**HUBER Climber Screen
ClimbMax®**